


**POWER LINE**


PTMDS24-4-1

(Optional casters shown)

NOTE: Ranges supplied with casters must be installed with an approved restraining device.

#### OPTIONAL FEATURES

- \* 6" (152.5 mm) swivel casters.
- \* Gas flex hose w/ quick disconnect and restraining device.
- \* Extra oven rack.
- \* 17" (432 mm) High Backguard.  
No charge in lieu of high shelf.
- \* 10" (254 mm) Low Profile Backguard.  
No charge in lieu of high shelf.
- \* Thicker griddle plates are optional.
- \* Thermostat controlled griddles.
- \* Hot tops 12" sections (305 mm).
- \* Galvanized exterior sides, aluminized oven interior with porcelain oven bottom and door panel (PTMDE model).
- \* Stainless steel exterior with fully porcelainized oven interior (PTMDU model).
- \* CE-approved flame failure device available on most models.

## GAS RESTAURANT RANGE 24"

### GENERAL SPECIFICATIONS

Gas medium duty range 24" (610 mm) wide with space-saver oven accepting 18" x 26" (457 mm x 660 mm) sheet pans. Oven is heated by a heavy duty straight tube burner. Lift off cast iron open top burners. Individual top grates for each burner. Available 5/8 inch (16mm) thick griddle plate. Valve controlled or thermostatically controlled. Griddles are heated by a heavy duty "H" burner. Available with hot tops in 12" (305 mm) sections. Hot tops are heated by heavy duty "H" burners. Aluminized oven interior. Porcelain inner door panel and removable oven bottom. Fully stainless steel exterior. Single deck high shelf is standard.

### STANDARD FEATURES

- \* Fully stainless steel exterior including single deck high shelf.
- \* 6" (152.5 mm) adjustable legs.
- \* 5" (127 mm) stainless steel front rail.
- \* Gas pressure regulator.
- \* One year limited parts and labor warranty.

### OVEN

- \* Heavy gauge welded frame construction.
- \* Aluminized oven interior. Porcelain inner door panel and removable oven bottom.
- \* Space-saver oven dimensions 20 1/4" wide, 27" deep, 14 5/8" high (514 mm x 686 mm x 363.5 mm).
- \* Removable chrome plated oven side racks.
- \* One chrome plated oven rack.
- \* Ribbed oven door for added strength.
- \* Thermostat is adjustable from 150° F to 500° F (66° C to 260° C).
- \* Heavy duty straight tube burner @ 27,000 BTU's (7.91 kW).
- \* Push button spark igniter for pilot.

### OPEN TOP BURNERS

- \* Cast iron lift off burners rated at 30,000 BTU's (8.79 kW).
- \* Spill-proof pilot ignition system.
- \* Individual cast iron top grates.
- \* Controlled by a brass valve with infinite adjustment.

### GRIDDLES

- \* 5/8" (16 mm) thick polished steel plate.
- \* 21 1/2" (546 mm) working depth.
- \* Spatula width grease trough.
- \* One heavy duty "H" burner per 12" (305 mm) section @ 20,000 BTU's (5.86 kW).
- \* Each 12" (305 mm) section is controlled by a valve or a thermostat.
- \* Manual control is standard.
- \* Thermostat control is optional.
- \* Large capacity grease container with integral lid.

### HOT TOP

- \* Heavy cast hot top available in 12" (305 mm) sections.
- \* Heavy duty "H" burner per 12" (305 mm) section @ 20,000 BTU's (5.86 kW).
- \* Hot top surface is level with open top burners for easy movement of pots.


### RADIANT CHAR BROILER

- \* Cast iron H-type burner per 12" section; at 30,000 BTU/hr (8.79kW).
- \* Heavy cast-iron radiants with multiple heat sinks.
- \* Heavy-duty cast-iron grates for maximum heat retention.
- \* Single piece precision brass valves with infinite heat control.

### CHAR-ROCK BROILERS

- \* Cast iron H-type burner per 12" section; at 30,000 BTU/hr (8.79kW).
- \* High quality lava rocks on cast iron supports provide maximum heat.
- \* Burners protected by heat shield to prevent blockage of ports and pilots.
- \* Heavy-duty cast-iron grates for maximum heat retention.
- \* Single piece precision brass valves with infinite heat control.

# GAS RESTAURANT RANGE 24"

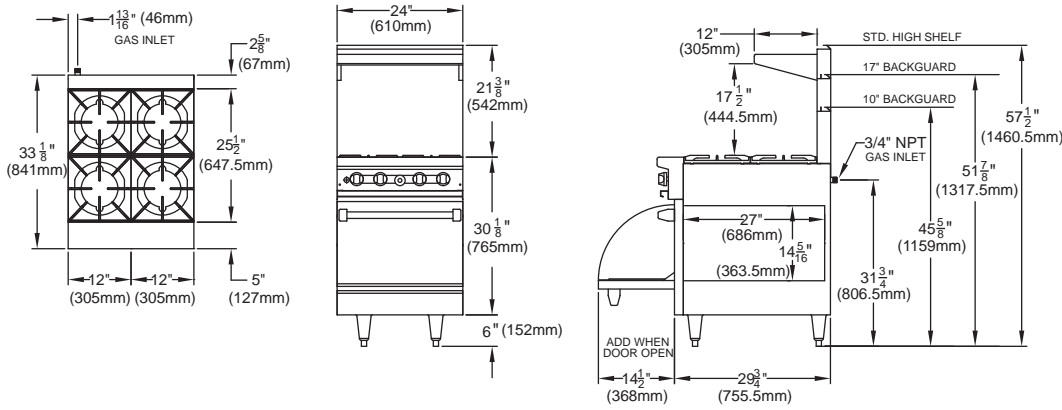

Crated Dimensions			
<b>Width</b> 30 3/4" (781mm)	<b>Depth</b> 45" (1143mm)	<b>Height</b> 41 1/4" (1048mm)	<b>Cubic Feet</b> 33

Entry Clearance	
<b>Crated</b> 33" (838mm)	<b>Uncrated</b> 25" (635mm)

Uncrated Exterior Dimensions			Oven Interior Dimensions			Installation Clearances From Combustibles		
<b>Height (w/highshelf)</b> 57 1/2" (1461mm)	<b>Width</b> 24" (610mm)	<b>Depth</b> 33 3/8" (841mm)	<b>Height</b> 14 7/16" (364mm)	<b>Width</b> 20 1/4" (514mm)	<b>Depth</b> 27" (686mm)	Open Burner	<b>Sides</b> 12" (305mm)	<b>Rear</b> 6" (152.5mm)
						Griddle, Hot Top, Char Broiler	6" (152.5mm)	6" (152.5mm)

Input Rating Per Burner Type (Natural and Propane Gas)						Operating Manifold Gas Pressure							
Open		Griddle		Char Broiler		Hot Top		Oven		Natural		Propane	
BTU	kW	BTU	kW	BTU	kW	BTU	kW	BTU	kW	"WC	mbar	"WC	mbar
30,000	8.79	20,000	5.86	30,000	8.79	20,000	5.86	27,000	7.91	5	12.45	10	24.9

Model Number	Description	Total BTU/Hr	Gross Weight	
			Lbs.	Kg
PTMDS24-4-1	Four open burners with space-saver oven	147,000	455	206
PTMDS24-4-0	Four open burners with storage base	120,000	405	184
PTMDS24-12G-2-1	12" griddle, two open burners with space-saver oven	107,000	470	214
PTMDS24-12G-2-0	12" griddle, two open burners with storage base	80,000	410	186
PTMDS24-24G-1	24" griddle with space-saver oven	67,000	495	225
PTMDS24-24G-0	24" griddle with storage base	40,000	435	198

**NOTE:** Add suffix "N" for natural gas, and "L" for propane.

Because of continuing product improvement, these specifications are subject to change without notice.



Printed July 2008  
Printed in the USA